


Product Features and Applications

This valve is used in wastewater treatment plants for sewage and wastewater at the bottom of discharge basins. It removes settled mud, sand, and debris from the bottom. The valve features an internal nylon-reinforced rubber diaphragm and an angle-type design to facilitate the smooth discharge of waste.

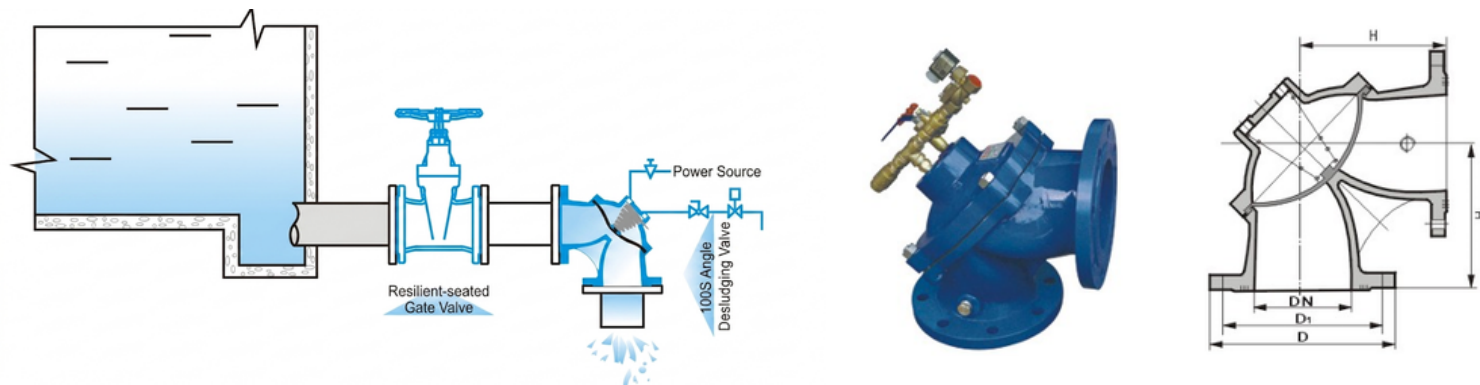

Main Performance Parameters

Part	Valve body, bonnet	Disc, spring	Membrane
Material	Cast iron	Stainless steel	Nylon reinforced SBR

Main External and Connection Dimensions

DN	50	65	80	100	125	150	200	250	300
D	160	180	195	215	245	280	335	405	460
D1	125	145	160	180	210	240	295	355	410
H	125	145	155	175	200	225	275	325	375