


Combination kinetic Air Release Valves Thread End

■ Tests:

- Hydraulic Test Acc To BS1074—PN10/PN16/25
- Seat:1.1XPN.BODY:1.5Xpn Operating Torque Test.


■ Applicable Standards:

- Pipe Thread According to EN1074
- Maximum Working Pressure 16Bar(1.6mpa)
- Maximum Working Temperture 100°C
- Screw Thread BSP/NPT
- PAT: 20191692464.8

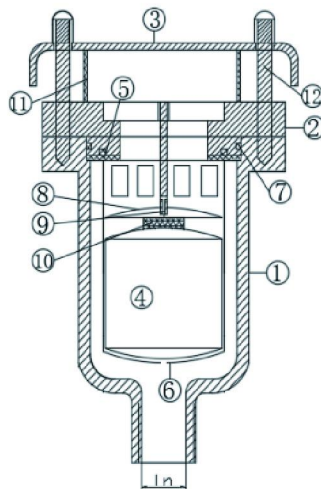[illegible]

■ MATERIAL LIST

Item No.	Part Name	Specification
1	Body	DI/GGG50
2	Bonnet	DI/GGG50
3	Cap	SS304
4	Sealing Ball	SS304
5	Gasket	EPDM
6	Ball cage	SS304
7	O-Rings	EPDM
8	Exhaust hood	SS304
9	Steering column	SS304
10	Ball Seal	EPDM
11	Insert	SS304
12	Bolt and nut	SS304

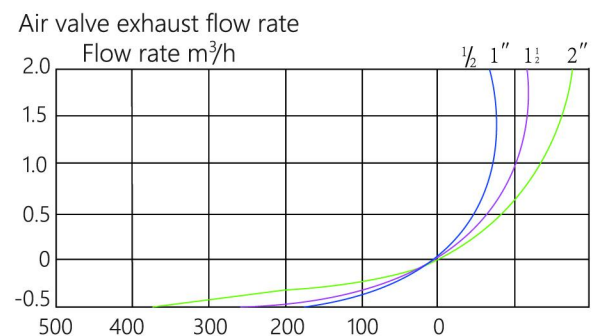

■ Dimensions (mm)

BSP screw thread				
in.½	in.¾	in.1	in.1½	in.2
15	20	25	40	50
H=278	H=278	H=278	H=278	H=278

■ Unit:(mm)

NPT screw thread				
in. 1/2	in. 3/4	in. 1	in. 1 1/2	in. 2
15	20	25	40	50
H=278	H=278	H=278	H=278	H=278