


Foot Valve DN350-DN800

■ Features:

- Square body
- Stainless steel screen
- Bolted bracket support
- Flange ends
- Surface treatment:RAL5017 FBE Coated

■ Technical Specification:

- Face to Face:DIN2533 PN16
- Flanges:EN1092-2 PN16
- Hydraulic test:BS EN12266-1 CLASS A
- Seat Test: 17.6bar
- Shell Test: 24bar

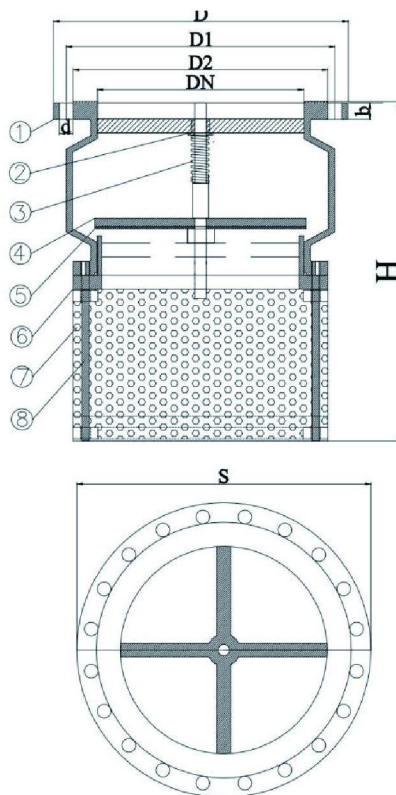

■ MATERIAL LIST

Item No.	Part Name	Specification
1	Body	Ductile Iron GGG50
2	Shaft Sleeve	Brass
3	Regulation Spring	SS304
4	Disc	Ductile Iron GGG50
5	Disc Sealing	NBR
6	Bonnet	Ductile Iron GGG50
7	Screen	SS304
8	Shaft Bracket	Carbon Steel

■ Dimensions (mm)

Size	D	EN 1092-2 PN16			b	f	H	S	W.T(kg)
		D1	D2	n-d					
DN350	520	470	438	16-28	27	3	650	520	139
DN400	580	525	490	16-31	28	3	750	580	168
DN450	640	585	550	20-31	30	3	850	640	213
DN500	715	650	610	20-34	31	3	950	715	275
DN600	840	770	725	20-37	36	5	1000	840	380
DN700	910	840	793	24-37	40	5	1050	910	480
DN800	1025	950	900	24-41	43	5	1100	1025	650